

Predicting RNA Secondary Structures with Arbitrary Pseudoknots by Maximizing the Number of Stacking Pairs

Samuel Jeong* Ming-Yang Kao† Tak-Wah Lam‡
Wing-Kin Sung§ Siu-Ming Yiu‡

Abstract

The paper investigates the computational problem of predicting RNA secondary structures. The general belief is that allowing pseudoknots makes the problem hard. Existing polynomial-time algorithms are heuristic algorithms with no performance guarantee and can only handle limited types of pseudoknots. In this paper we initiate the study of predicting RNA secondary structures with a maximum number of stacking pairs while allowing arbitrary pseudoknots. We obtain two approximation algorithms with worst-case approximation ratios of $1/2$ and $1/3$ for planar and general secondary structures, respectively. For an RNA sequence of n bases, the approximation algorithm for planar secondary structures runs in $O(n^3)$ time while that for the general case runs in linear time. Furthermore, we prove that allowing pseudoknots makes it NP-hard to maximize the number of stacking pairs in a planar secondary structure. This result is in contrast with the recent NP-hard results on pseudoknots which are based on optimizing some general and complicated energy functions.

1 Introduction

Ribonucleic acids (RNAs) are molecules that are responsible for regulating many genetic and metabolic activities in cells. An RNA is single-stranded and can be considered as a sequence of nucleotides (also known as bases). There are four basic nucleotides, namely, Adenine (A), Cytosine (C), Guanine (G), and Uracil (U). An RNA folds into a 3-dimensional structure by forming pairs of bases. Paired bases tend to stabilize the RNA (i.e., have negative free energy). Yet base pairing does not occur arbitrarily. In particular, A-U and C-G form stable pairs and are known as the *Watson-Crick* base pairs. Other base pairings are less stable and often ignored. An example of a folded RNA is shown in Figure 1. Note that this figure is just schematic; in practice, RNAs are 3-dimensional molecules.

*Department of Computer Science, Yale University, New Haven, CT 06520.

†Department of Computer Science, Northwestern University, Evanston, IL 60201 (kao@cs.northwestern.edu). This research was supported in part by NSF Grant EIA-0112934.

‡Department of Computer Science, The University of Hong Kong, Hong Kong ({twlam, smyiu}@cs.hku.hk). This research was supported in part by Hong Kong RGC grant HKU-7027/98E.

§Department of Computer Science, National University of Singapore, 3 Science Drive 2, Singapore 117543 (ksung@comp.nus.edu.sg).

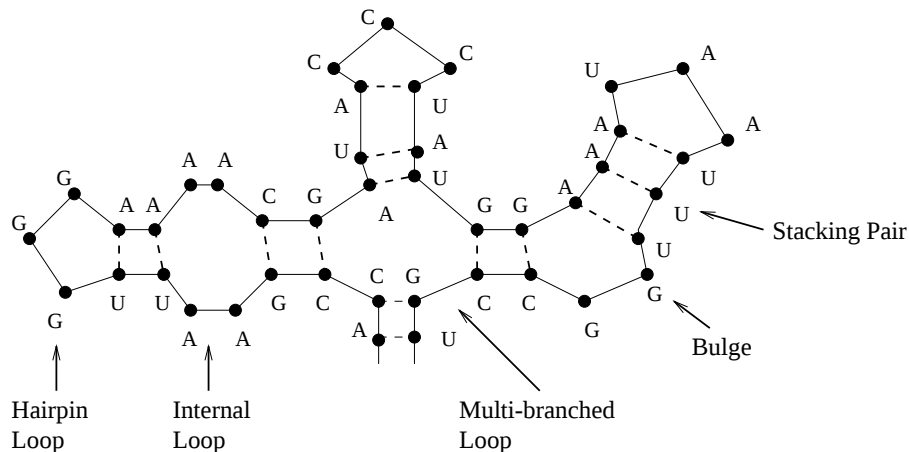


Figure 1: Example of a folded RNA

The 3-dimensional structure is related to the function of the RNA. Yet existing experimental techniques for determining the 3-dimensional structures of RNAs are often very costly and time consuming (see, e.g., [6]). The secondary structure of an RNA is the set of base pairings formed in its 3-dimensional structure. To determine the 3-dimensional structure of a given RNA sequence, it is useful to determine the corresponding secondary structure. As a result, it is important to design efficient algorithms to predict the secondary structure with computers.

From a computational viewpoint, the challenge of the RNA secondary structure prediction problem arises from some special structures called pseudoknots, which are defined as follows. Let S be an RNA sequence $s_1, s_2, \dots, s_n$. A *pseudoknot* is composed of two interleaving base pairs, i.e., (s_i, s_j) and (s_k, s_ℓ) such that $i < k < j < \ell$. See Figure 2 for examples.

If we assume that the secondary structure of an RNA contains no pseudoknots, the secondary structure can be decomposed into a few types of loops: stacking pairs, hairpins, bulges, internal loops, and multiple loops (see, e.g., Tompa's lecture notes [9] or Waterman's book [11]). A *stacking pair* is a loop formed by two pairs of consecutive bases (s_i, s_j) and (s_{i+1}, s_{j-1}) with $i + 4 \leq j$. See Figure 1 for an example. By definition, a stacking pair contains no unpaired bases and any other kinds of loops contain one or more unpaired bases. Since unpaired bases are destabilizing and have positive free energy, stacking pairs are the only type of loops that have negative free energy and stabilize the secondary structure. It is also natural to assume that the free energies of loops are independent. Then an optimal pseudoknot-free secondary structure can be computed using dynamic programming in $O(n^3)$ time [3, 5, 12, 13].

However, pseudoknots are known to exist in some RNAs. For predicting secondary structures with pseudoknots, Nussinov et al. [7] have studied the case where the energy function is minimized when the number of base pairs is maximized and have obtained an $O(n^3)$ -time algorithm for predicting secondary structures. Based on some special energy functions, Lyngso and Pedersen [4] have proven that determining the optimal secondary

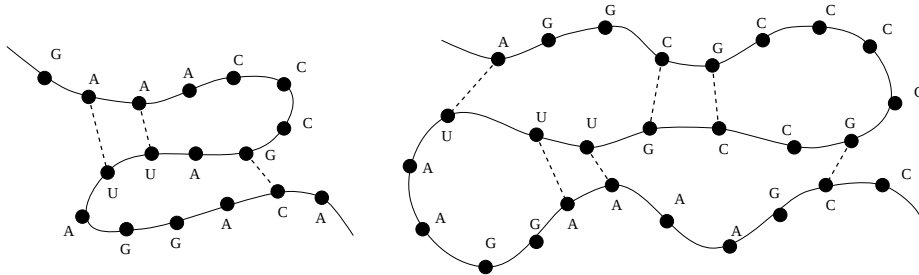


Figure 2: Examples of pseudoknots

structure possibly with pseudoknots is NP-hard. Akutsu [1] has shown that it is NP-hard to determine an optimal planar secondary structure, where a secondary structure is *planar* if the graph formed by the base pairings and the backbone connections of adjacent bases is planar (see Section 2 for a more detailed definition). Rivas and Eddy [8], Uemura et al. [10], and Akutsu [1] have also proposed polynomial-time algorithms that can handle limited types of pseudoknots; note that the exact types of such pseudoknots are implicit in these algorithms and difficult to determine.

Although it might be desirable to have a better classification of pseudoknots and better algorithms that can handle a wider class of pseudoknots, this paper approaches the problem in a different general direction. We initiate the study of predicting RNA secondary structures that allow arbitrary pseudoknots while maximizing the number of stacking pairs. Such a simple energy function is meaningful as stacking pairs are the only loops that stabilize secondary structures. We obtain two approximation algorithms with worst-case ratios of $1/2$ and $1/3$ for planar and general secondary structures, respectively. The planar approximation algorithm makes use of a geometric observation that allows us to visualize the planarity of stacking pairs on a rectangular grid; interestingly, such an observation does not hold if our aim is to maximize the number of base pairs. This algorithm runs in $O(n^3)$ time. The second approximation algorithm is more complicated and is based on a combination of multiple “greedy” strategies. A straightforward analysis cannot lead to the approximation ratio of $1/3$. We make use of amortization over different steps to obtain the desired ratio. This algorithm runs in $O(n)$ time.

To complement these two algorithms, we also prove that allowing pseudoknots makes it NP-hard to find the planar secondary structure with the largest number of stacking pairs. The proof makes use of a reduction from a well-known NP-complete problem called Tripartite Matching [2]. This result indicates that the hardness of the RNA secondary structure prediction problem may be inherent in the pseudoknot structures and may not be necessarily due to the complication of the energy functions. This is in contrast to the other NP-hardness results discussed earlier.

The rest of this paper is organized into four sections. Section 2 discusses some basic properties. Sections 3 and 4 present the approximation algorithms for planar and general secondary structures, respectively. Section 5 details the NP-hardness result. Section 6 concludes the paper with open problems.

2 Preliminaries

Let $S = s_1 s_2 \cdots s_n$ be an RNA sequence of n bases. A *secondary structure* $\mathcal{P}$ of S is a set of Watson-Crick pairs $(s_{i_1}, s_{j_1}), \dots, (s_{i_p}, s_{j_p})$, where $s_{i_r} + 2 \leq s_{j_r}$ for all $r = 1, \dots, p$ and no two pairs share a base. We denote q ($q \geq 1$) consecutive stacking pairs $(s_i, s_j), (s_{i+1}, s_{j-1}), (s_{i+1}, s_{j-1}), (s_{i+2}, s_{j-2}), \dots, (s_{i+q-1}, s_{j-q+1}), (s_{i+q}, s_{j-q})$ of $\mathcal{P}$ by $(s_i, s_{i+1}, \dots, s_{i+q}; s_{j-q}, \dots, s_{j-1}, s_j)$.

Definition 1 Given a secondary structure $\mathcal{P}$, we define an undirected graph $G(\mathcal{P})$ such that the bases of S are the nodes of $G(\mathcal{P})$ and (s_i, s_j) is an edge of $G(\mathcal{P})$ if $j = i + 1$ or (s_i, s_j) is a base pair in $\mathcal{P}$.

Definition 2 A secondary structure $\mathcal{P}$ is planar if $G(\mathcal{P})$ is a planar graph.

Definition 3 A secondary structure $\mathcal{P}$ is said to contain an interleaving block if $\mathcal{P}$ contains three stacking pairs $(s_i, s_{i+1}; s_{j-1}, s_j), (s_{i'}, s_{i'+1}; s_{j'-1}, s_{j'}), (s_{i''}, s_{i''+1}; s_{j''-1}, s_{j''})$ where $i < i' < i'' < j < j' < j''$.

Lemma 2.1 If a secondary structure $\mathcal{P}$ contains an interleaving block, $\mathcal{P}$ is non-planar.

Proof. Suppose $\mathcal{P}$ contains an interleaving block. Without loss of generality, we assume that $\mathcal{P}$ contains the stacking pairs $(s_1, s_2; s_7, s_8), (s_3, s_4; s_9, s_{10}),$ and $(s_5, s_6; s_{11}, s_{12})$. Figure 3(a) shows the subgraph of $G(\mathcal{P})$ corresponding to these stacking pairs. Since this subgraph contains a homeomorphic copy of $K_{3,3}$ (see Figure 3(b)), $G(\mathcal{P})$ and $\mathcal{P}$ are non-planar. $\square$

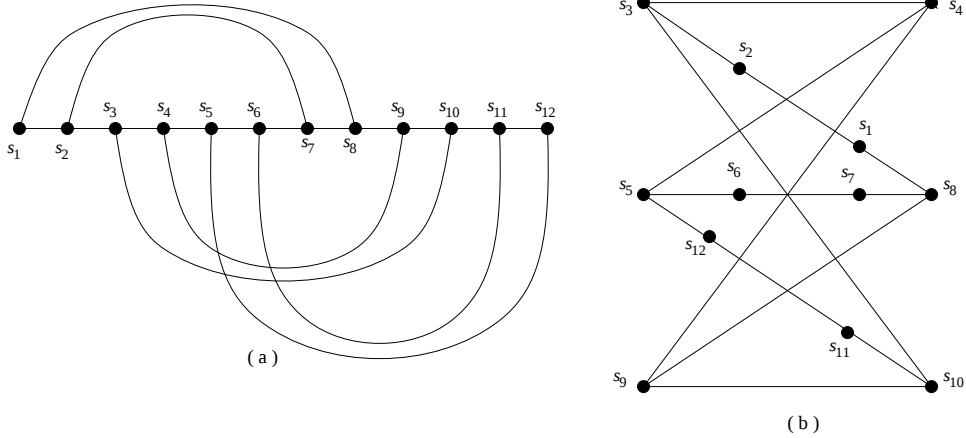


Figure 3: Interleaving block

3 An Approximation Algorithm for Planar Secondary Structures

We present an algorithm which, given an RNA sequence $S = s_1 s_2 \dots s_n$, constructs a *planar* secondary structure of S to approximate one with the maximum number of stacking pairs with a ratio of at least $1/2$. This approximation algorithm is based on the subtle observation in Lemma 3.1 that if a secondary structure $\mathcal{P}$ is planar, the subgraph of $G(\mathcal{P})$ which contains *only* the stacking pairs of $\mathcal{P}$ can be embedded in a grid with a useful property. This property enables us to consider only the secondary structure of S *without pseudoknots* in order to achieve $1/2$ approximation ratio.

Definition 4 Given a secondary structure $\mathcal{P}$, we define a *stacking pair embedding* of $\mathcal{P}$ on a grid as follows. Represent the bases of S as n consecutive grid points on the same horizontal grid line L such that s_i and s_{i+1} ($1 \leq i < n$) are connected directly by a horizontal grid edge. If $(s_i, s_{i+1}; s_{j-1}, s_j)$ is a stacking pair of $\mathcal{P}$, s_i and s_{i+1} are connected to s_j and s_{j-1} respectively by a sequence of grid edges such that the two sequences must be either both above or both below L .

Figure 4 shows a stacking pair embedding (Figure 4(b)) of a given secondary structure (Figure 4(a)). Note that (s_3, s_9) do not form a stacking pair with other base pair, so s_3 is not connected to s_9 in the stacking pair embedding. Similarly, s_4 is not connected to s_{10} in the embedding.

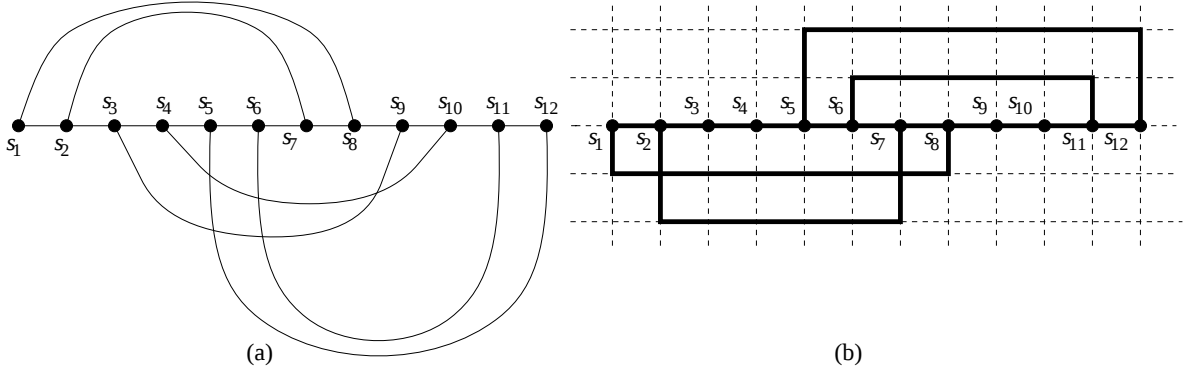


Figure 4: An example of a stacking pair embedding

Definition 5 A *stacking pair embedding* is said to be *planar* if it can be drawn in such a way that no lines cross or overlap with each other in the grid.

The embedding shown in Figure 4(b) is planar.

Lemma 3.1 Let $\mathcal{P}$ be a secondary structure of an RNA sequence S . Let E be a stacking pair embedding of $\mathcal{P}$. If $\mathcal{P}$ is planar, then E must be planar.

Proof. If $\mathcal{P}$ does not have a planar stacking pair embedding, we claim that $\mathcal{P}$ contains an interleaving block. Let L be the horizontal grid line that contains the bases of S in E . Since $\mathcal{P}$ does not have a planar stacking pair embedding, we can assume that E has two stacking pairs intersect above L (see Figure 5(a)).

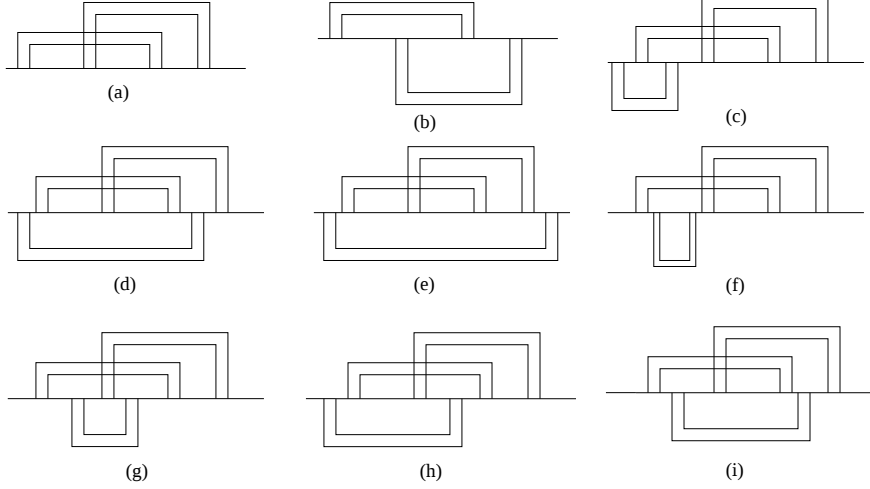


Figure 5: Non-planar stacking pair embedding

If there is no other stacking pair underneath these two pairs, we can flip one of the pairs below L as shown in Figure 5(b). So, there must be at least one stacking pair underneath these two pairs. By checking all possible cases (all non-symmetric cases are shown in Figures 5(c) to (i)), it can be shown that E cannot be redrawn without crossing or overlapping lines only if it contains an interleaving block (Figures 5(h) and (i)). So, by Lemma 2.1, $\mathcal{P}$ is non-planar. $\square$

By Lemma 3.1, we can relate two secondary structures having the maximum number of stacking pairs with and without pseudoknots in the following lemma.

Lemma 3.2 *Given an RNA sequence S , let N^* be the maximum number of stacking pairs that can be formed by a planar secondary structure of S and let W be the maximum number of stacking pairs that can be formed by S without pseudoknots. Then, $W \geq \frac{N^*}{2}$.*

Proof. Let $\mathcal{P}^*$ be a planar secondary structure of S with N^* stacking pairs. Since $\mathcal{P}^*$ is planar, by Lemma 3.1, any stacking pair embedding of $\mathcal{P}^*$ is planar.

Let E be a stacking pair embedding of $\mathcal{P}^*$ such that no lines cross each other in the grid. Let L be the horizontal grid line of E which contains all bases of S . Let n_1 and n_2 be the number of stacking pairs which are drawn above and below L , respectively. Without loss of generality, assume that $n_1 \geq n_2$. Now, we construct another planar secondary structure $\mathcal{P}$ from E by deleting all stacking pairs which are drawn below L . Obviously, $\mathcal{P}$ is a planar secondary structure of S without pseudoknots. Since $n_1 \geq n_2$, $n_1 \geq \frac{N^*}{2}$. As $W \geq n_1$, $W \geq \frac{N^*}{2}$. $\square$

Based on Lemma 3.2, we now present the dynamic programming algorithm *MaxSP* which computes the maximum number of stacking pairs that can be formed by an RNA sequence $S = s_1 s_2 \dots s_n$ without pseudoknots.

Algorithm *MaxSP*

Define $V(i, j)$ (for $j \geq i$) as the maximum number of stacking pairs without pseudoknots that can be formed by $s_i \dots s_j$ if s_i and s_j form a Watson-Crick pair. Let $W(i, j)$ ($j \geq i$) be the maximum number of stacking pairs without pseudoknots that can be formed by $s_i \dots s_j$. Obviously, $W(1, n)$ gives the maximum number of stacking pairs that can be formed by S without pseudoknots.

Basis:

For $j = i, i + 1, i + 2$ or $i + 3$ ($j \leq n$),

$$\begin{aligned} V(i, j) &= 0 & \text{if } s_i, s_j \text{ form a Watson-Crick pair;} \\ W(i, j) &= 0. \end{aligned}$$

Recurrence:

For $j > i + 3$,

$$\begin{aligned} W(i, j) &= \max \left\{ \begin{array}{l} V(i, j) \\ W(i + 1, j) \\ W(i, j - 1) \end{array} \quad \begin{array}{l} \text{if } s_i, s_j \text{ form a Watson-Crick pair} \end{array} \right\}; \\ V(i, j) &= \max \left\{ \begin{array}{l} V(i + 1, j - 1) + 1 \\ \max_{i+1 \leq k \leq j-2} \{W(i + 1, k) + W(k + 1, j - 1)\} \end{array} \quad \begin{array}{l} \text{if } s_{i+1}, s_{j-1} \text{ form a Watson-Crick pair} \end{array} \right\}. \end{aligned}$$

Lemma 3.3 *Given an RNA sequence S of length n , Algorithm *MaxSP* computes the maximum number of stacking pairs that can be formed by S without pseudoknots in $O(n^3)$ time and $O(n^2)$ space.*

Proof. There are $O(n^2)$ entries $V(i, j)$ and $W(i, j)$ to be filled. To fill an entry of $V(i, j)$, we check at most $O(n)$ values. To fill an entry of $W(i, j)$, $O(1)$ time suffices. The total time complexity for filling all entries is $O(n^3)$. Storing all entries requires $O(n^2)$ space.

□

Although Algorithm *MaxSP* presented in the above only computes the number of stacking pairs, it can be easily modified to compute the secondary structure. Thus we have the following theorem.

Theorem 3.4 *The Algorithm *MaxSP* is an $(1/2)$ -approximation algorithm for the problem of constructing a secondary structure which maximizes the number of stacking pairs for an RNA sequence S .*

4 An Approximation Algorithm for General Secondary Structures

We present Algorithm *GreedySP()* which, given an RNA sequence $S = s_1s_2 \dots s_n$, constructs a secondary structure of S (not necessarily planar) with at least $1/3$ of the maximum possible number of stacking pairs. The approximation algorithm uses a greedy approach. Figure 6 shows the algorithm *GreedySP()*.

```
// Let  $S = s_1s_2 \dots s_n$  be the input RNA sequence. Initially, all  $s_j$  are unmarked.
// Let  $E$  be the set of base pairs output by the algorithm. Initially,  $E = \emptyset$ .

GreedySP( $S, i$ )    //  $i \geq 3$ 

1. Repeatedly find the leftmost  $i$  consecutive stacking pairs  $SP$  (i.e., find
   ( $s_p, \dots, s_{p+i}; s_{q-i}, \dots, s_q$ ) such that  $p$  is as small as possible) formed by un-
   marked bases. Add  $SP$  to  $E$  and mark all these bases.

2. For  $k = i - 1$  downto 2,
   Repeatedly find any  $k$  consecutive stacking pairs  $SP$  formed by unmarked bases.
   Add  $SP$  to  $E$  and mark all these bases.

3. Repeatedly find the leftmost stacking pair  $SP$  formed by unmarked bases. Add
    $SP$  to  $E$  and mark all these bases.
```

Figure 6: A $1/3$ -Approximation Algorithm

In the following, we analyze the approximation ratio of this algorithm. The algorithm *GreedySP*(S, i) will generate a sequence of SP 's denoted by $SP_1, SP_2, \dots, SP_h$.

Fact 4.1 *For any SP_j and SP_k ($j \neq k$), the stacking pairs in SP_j do not share any base with those in SP_k .*

For each $SP_j = (s_p, \dots, s_{p+t}; s_{q-t}, \dots, s_q)$, we define two intervals of indexes, $\mathcal{I}_j$ and $\mathcal{J}_j$, as $[p..p+t]$ and $[q-t..q]$, respectively. In order to compare the number of stacking pairs formed with that in the optimal case, we have the following definition.

Definition 6 *Let $\mathcal{P}$ be an optimal secondary structure of S with the maximum number of stacking pairs. Let $\mathcal{F}$ be the set of all stacking pairs of $\mathcal{P}$. For each SP_j computed by *GreedySP*(S, i) and $\beta = \mathcal{I}_j$ or $\mathcal{J}_j$,*

let $\mathcal{X}_\beta = \{(s_k, s_{k+1}; s_{w-1}, s_w) \in \mathcal{F} \mid \text{at least one of indexes } k, k+1, w-1, w \text{ is in } \beta\}$.

Note that $\mathcal{X}_\beta$'s may not be disjoint.

Lemma 4.2 $\bigcup_{1 \leq j \leq h} \{\mathcal{X}_{\mathcal{I}_j} \cup \mathcal{X}_{\mathcal{J}_j}\} = \mathcal{F}$.

Proof. We prove this lemma by contradiction. Suppose that there exists a stacking pair $(s_k, s_{k+1}; s_{w-1}, s_w)$ in $\mathcal{F}$ but not in any of $\mathcal{X}_{\mathcal{I}_j}$ and $\mathcal{X}_{\mathcal{J}_j}$. By Definition 6, none of the

indexes, $k, k+1, w-1, w$ is in any of $\mathcal{I}_j$ and $\mathcal{J}_j$. This contradicts with Step 3 of Algorithm *GreedySP*(S, i). $\square$

Definition 7 For each $\mathcal{X}_{\mathcal{I}_j}$,

$$\text{let } \mathcal{X}'_{\mathcal{I}_j} = \mathcal{X}_{\mathcal{I}_j} - \bigcup_{k < j} \{\mathcal{X}_{\mathcal{I}_k} \cup \mathcal{X}_{\mathcal{J}_k}\}, \text{ and let } \mathcal{X}'_{\mathcal{J}_j} = \mathcal{X}_{\mathcal{J}_j} - \bigcup_{k < j} \{\mathcal{X}_{\mathcal{I}_k} \cup \mathcal{X}_{\mathcal{J}_k}\} - \mathcal{X}_{\mathcal{I}_j}$$

Let $|SP_j|$ be the number of stacking pairs represented by SP_j . Let $|\mathcal{I}_j|$ and $|\mathcal{J}_j|$ be the numbers of indexes in the intervals $\mathcal{I}_j$ and $\mathcal{J}_j$, respectively.

Lemma 4.3 Let N be the number of stacking pairs computed by Algorithm *GreedySP*(S, i) and N^* be the maximum number of stacking pairs that can be formed by S . If for all j , we have $|SP_j| \geq \frac{1}{r} \times |(\mathcal{X}'_{\mathcal{I}_j} \cup \mathcal{X}'_{\mathcal{J}_j})|$, then $N \geq \frac{1}{r} \times N^*$.

Proof. By Definition 7, $\bigcup_k \{\mathcal{X}_{\mathcal{I}_k} \cup \mathcal{X}_{\mathcal{J}_k}\} = \bigcup_k \{\mathcal{X}'_{\mathcal{I}_k} \cup \mathcal{X}'_{\mathcal{J}_k}\}$. Then by Fact 4.1, $N = \sum_j |SP_j|$. Thus, $N \geq \frac{1}{r} \times |\bigcup_k \{\mathcal{X}_{\mathcal{I}_k} \cup \mathcal{X}_{\mathcal{J}_k}\}|$. By Lemma 4.2, $N \geq \frac{1}{r} \times N^*$. $\square$

Lemma 4.4 For each SP_j computed by *GreedySP*(S, i), we have $|SP_j| \geq \frac{1}{3} \times |(\mathcal{X}'_{\mathcal{I}_j} \cup \mathcal{X}'_{\mathcal{J}_j})|$.

Proof. There are three cases as follows.

Case 1: SP_j is computed by *GreedySP*(S, i) in Step 1. Note that $SP_j = (s_p, \dots, s_{p+i}; s_{q-i}, \dots, s_q)$ is the leftmost i consecutive stacking pairs, i.e., p is the smallest possible. By definition, $|\mathcal{X}'_{\mathcal{I}_j}|, |\mathcal{X}'_{\mathcal{J}_j}| \leq i+2$. We further claim that $|\mathcal{X}'_{\mathcal{I}_j}| \leq i+1$. Then $|SP_j|/|(\mathcal{X}'_{\mathcal{I}_j} \cup \mathcal{X}'_{\mathcal{J}_j})| \geq i/((i+1) + (i+2)) \geq 1/3$ (as $i \geq 3$).

We prove the claim by contradiction. Assume that $|\mathcal{X}'_{\mathcal{I}_j}| = i+2$. That is, for some integer t , $\mathcal{F}$ has $i+2$ consecutive stacking pairs $(s_{p-1}, \dots, s_{p+i+1}; s_{t-i-1}, \dots, s_{t+1})$. Furthermore, none of the bases $s_{p-1}, \dots, s_{p+i+1}, s_{t-i-1}, \dots, s_{t+1}$ are marked before SP_j is chosen; otherwise, suppose one such base, says s_a , is marked when the algorithm chooses SP_ℓ for $\ell < j$, then a stacking pair adjacent to s_a does not belong to $\mathcal{X}'_{\mathcal{I}_j}$ and they belong to $\mathcal{X}'_{\mathcal{I}_\ell}$ or $\mathcal{X}'_{\mathcal{J}_\ell}$ instead. Therefore, $(s_{p-1}, \dots, s_{p+i-1}; s_{t-i+1}, \dots, s_{t+1})$ is the leftmost i consecutive stacking pairs formed by unmarked bases before SP_j is chosen. As SP_j is not the leftmost i consecutive stacking pairs, this contradicts the selection criteria of SP_j . The claim follows.

Case 2: SP_j is computed by *GreedySP*(S, i) in Step 2. Let $|SP_j| = k \geq 2$. Let $SP_j = (s_p, \dots, s_{p+k}; s_{q-k}, \dots, s_q)$. By definition, $|\mathcal{X}'_{\mathcal{I}_j}|, |\mathcal{X}'_{\mathcal{J}_j}| \leq k+2$. We claim that $|\mathcal{X}'_{\mathcal{I}_j}|, |\mathcal{X}'_{\mathcal{J}_j}| \leq k+1$. Then $|SP_j|/|(\mathcal{X}'_{\mathcal{I}_j} \cup \mathcal{X}'_{\mathcal{J}_j})| \geq k/((k+1) + (k+1))$, which is at least $1/3$ as $k \geq 2$.

To show that $|\mathcal{X}'_{\mathcal{I}_j}| \leq k+1$ by contradiction, assume $|\mathcal{X}'_{\mathcal{I}_j}| = k+2$. Thus, for some integer t , there exist $k+2$ consecutive stacking pairs $(s_{p-1}, \dots, s_{p+k+1}; s_{t-k-1}, \dots, s_{t+1})$. Similarly to case 1, we can show that none of the bases $s_{p-1}, \dots, s_{p+k+1}, s_{t-k-1}, \dots, s_{t+1}$ are marked before SP_j is chosen. Thus, *GreedySP*(S, i) should select some $k+1$ or $k+2$ consecutive stacking pairs instead of the chosen k consecutive stacking pairs, reaching a contradiction. Similarly, we can show $|\mathcal{X}'_{\mathcal{J}_j}| \leq k+1$.

Case 3: SP_j is computed by *GreedySP*(S, i) in Step 3. SP_j is the leftmost stacking pair when it is chosen. Let $SP_j = (s_p, s_{p+1}; s_{q-1}, s_q)$. By the same approach as in Case 2, we can show $|\mathcal{X}'_{\mathcal{I}_j}|, |\mathcal{X}'_{\mathcal{J}_j}| \leq 2$. We further claim $|\mathcal{X}'_{\mathcal{I}_j}| \leq 1$. Then $|SP_j|/|(\mathcal{X}'_{\mathcal{I}_j} \cup \mathcal{X}'_{\mathcal{J}_j})| \geq 1/(1+2) = 1/3$.

To verify $|\mathcal{X}'_{\mathcal{I}_j}| \leq 1$, we consider all possible cases with $|\mathcal{X}'_{\mathcal{I}_j}| = 2$ while there are no two consecutive stacking pairs. The only possible case is that for some integers r, t , both $(s_{p-1}, s_p; s_{r-1}, s_r)$ and $(s_p, s_{p+1}; s_{t-1}, s_t)$ belong to $\mathcal{X}'_{\mathcal{I}_j}$. Then, SP_j cannot be the leftmost stacking pair formed by unmarked bases, contradicting the selection criteria of SP_j . $\square$

Theorem 4.5 *Let S be an RNA sequence. Let N^* be the maximum number of stacking pairs that can be formed by any secondary structure of S . Let N be the number of stacking pairs output by $\text{GreedySP}(S, i)$. Then, $N \geq \frac{N^*}{3}$.*

Proof. By Lemmas 4.3 and 4.4, the result follows. $\square$

We remark that by setting $i = 3$ in $\text{GreedySP}(S, i)$, we can already achieve the approximation ratio of $1/3$. The following theorem gives the time and space complexity of the algorithm.

Theorem 4.6 *Given an RNA sequence S of length n and a constant k , Algorithm $\text{GreedySP}(S, k)$ can be implemented in $O(n)$ time and $O(n)$ space.*

Proof. Recall that the bases of an RNA sequence are chosen from the alphabet $\{A, U, G, C\}$. If k is a constant, there are only constant number of different patterns of consecutive stacking pairs that we must consider. For any $1 \leq j \leq k$, there are only 4^j different strings that can be formed by the four characters $\{A, U, G, C\}$. So, the locations of the occurrences of these possible strings in the RNA sequence can be recorded in an array of linked lists indexed by the pattern of the string using $O(n)$ time preprocessing. There are at most 4^j linked lists for any fixed j and there are at most n entries in these linked lists. In total, there are at most kn entries in all linked lists for all possible values of j .

Now, we fix a constant j . To locate all j consecutive stacking pairs, we scan the RNA sequence from left to right. For each substring of j consecutive characters, we look up the array to see whether we can form j consecutive stacking pairs. By simple bookkeeping, we can keep track which bases have been used already. Each entry in the linked lists will only be scanned at most once, so the whole procedure takes only $O(n)$ time. Since k is a constant, we can repeat the whole procedure for k different values of j , and the total time complexity is still $O(n)$ time. $\square$

5 NP-completeness

In this section, we show that it is NP-hard to find a planar secondary structure with the largest number of stacking pairs. We consider the following decision problem. Given an RNA sequence S and an integer h , we wish to determine whether the largest possible number of stacking pairs in a planar secondary structure of S , denoted $\text{sp}(S)$, is at least h . Below we show that this decision problem is NP-complete by reducing the tripartite matching problem [2] to it, which is defined as follows.

Given three node sets X, Y , and Z with the same cardinality n and an edge set $E \subseteq X \times Y \times Z$ of size m , the *tripartite matching problem* is to determine whether E contains

a perfect matching, i.e., a set of n edges which touches every node of X , Y , and Z exactly once.

The remainder of this section is organized as follows. Section 5.1 shows how we construct in polynomial time an RNA sequence S_E and an integer h from a given instance (X, Y, Z, E) of the tripartite matching problem, where h depends on n and m . Section 5.2 shows that if E contains a perfect matching, then $\text{sp}(S_E) \geq h$. Section 5.3 is the non-trivial part, showing that if E does not contain a perfect matching, then $\text{sp}(S_E) < h$. Combining these three sections, we can conclude that it is NP-hard to maximize the number of stacking pairs for planar RNA secondary structures.

5.1 Construction of the RNA sequence S_E

Consider any instance (X, Y, Z, E) of the tripartite matching problem. We construct an RNA sequence S_E and an integer h as follows. Let $X = \{x_1, \dots, x_n\}$, $Y = \{y_1, \dots, y_n\}$, and $Z = \{z_1, \dots, z_n\}$. Furthermore, let $E = \{e_1, e_2, \dots, e_m\}$, where each edge $e_j = (x_{p_j}, y_{q_j}, z_{r_j})$. Recall that an RNA sequence contains characters chosen from the alphabet $\{A, U, G, C\}$. Below we denote A^i , where i is any positive integer, as the sequence of i A's. Furthermore, A^+ means a sequence of one or more A's.

Let $d = \max\{6n, 4(m+1)\} + 1$. Define the following four RNA sequences for every positive integer $k < d$.

- $\delta(k)$ is the sequence $U^d A^k G U^d A^{d-k}$, and $\overline{\delta(k)}$ is the sequence $U^{d-k} A^d G U^k A^d$.
- $\pi(k)$ is the sequence $C^{2d+2k} A G C^{4d-2k}$, and $\overline{\pi(k)}$ is the sequence $G^{4d-2k} A G^{2d+2k}$.

Fragments: Note that the sequences $\delta(k)$ and $\overline{\delta(k)}$ are each composed of two substrings in the form of $U^+ A^+$, separated by a character G . Each of these two substrings is called a *fragment*. Similarly, the two substrings of the form C^+ separated by AG in $\pi(k)$ and the two substrings of the form G^+ separated by the character A in $\overline{\pi(k)}$ are also called fragments.

Node Encoding: Each node in the three node sets X , Y , and Z is associated with a unique sequence. For $1 \leq i \leq n$, let $\langle x_i \rangle$, $\langle y_i \rangle$, $\langle z_i \rangle$ denote the sequences $\delta(i)$, $\delta(n+i)$, $\delta(2n+i)$, respectively. Intuitively, $\langle x_i \rangle$ is the encoding of the node x_i , and similarly $\langle y_i \rangle$ and $\langle z_i \rangle$ are for the nodes y_i and z_i , respectively. Furthermore, define $\langle \overline{x_i} \rangle = \overline{\delta(i)}$, $\langle \overline{y_i} \rangle = \overline{\delta(n+i)}$, and $\langle \overline{z_i} \rangle = \overline{\delta(2n+i)}$.

The node set X is associated with two sequences $\mathcal{X} = \langle x_1 \rangle G \langle x_2 \rangle G \dots G \langle x_n \rangle$ and $\overline{\mathcal{X}} = \langle \overline{x_n} \rangle G \langle \overline{x_{n-1}} \rangle G \dots G \langle \overline{x_1} \rangle$. Let $\mathcal{X} - x_i = \langle x_1 \rangle G \dots G \langle x_{i-1} \rangle G \langle x_{i+1} \rangle G \dots G \langle x_n \rangle$ and $\overline{\mathcal{X}} - x_i = \langle \overline{x_n} \rangle G \dots G \langle \overline{x_{i+1}} \rangle G \langle \overline{x_{i-1}} \rangle G \dots G \langle \overline{x_1} \rangle$, where x_i is any node in X . Similarly, the node sets Y and Z are associated with sequences $\mathcal{Y}$, $\overline{\mathcal{Y}}$, and $\mathcal{Z}$, $\overline{\mathcal{Z}}$, respectively.

Edge Encoding: For each edge e_j (where $1 \leq j \leq m$), we define four delimiter sequences, namely, $V_j = \pi(j)$, $W_j = \pi(m+1+j)$, $\overline{V_j} = \overline{\pi(j)}$, and $\overline{W_j} = \overline{\pi(m+1+j)}$. Assume that $e_j = (x_{p_j}, y_{q_j}, z_{r_j})$. Then e_j is encoded by the sequence S_j defined as

$$AG V_j AG W_j AG \mathcal{X} G \mathcal{Y} G \mathcal{Z} G (\overline{\mathcal{Z}} - z_{r_j}) G (\overline{\mathcal{Y}} - y_{q_j}) G (\overline{\mathcal{X}} - x_{p_j}) \overline{V_j} A \overline{W_j}.$$

Let S_{m+1} be a special sequence defined as $AG V_{m+1} AG W_{m+1} AG \overline{Z} G \overline{Y} G \overline{X} \overline{V_{m+1}} A \overline{W_{m+1}}$. In the following discussion, each S_j is referred to as a *region*.

Finally, we define S_E to be the sequence $S_{m+1}S_m \cdots S_1$. Let $\sigma = 3n(3d-2) + 6d-1$ and let $h = m\sigma + n(6d-4) + 12d-5$. Note that S_E has $O((n+m)^3)$ characters and can be constructed in $O(|S_E|)$ time. In Sections 5.2 and 5.3, we show that $\text{sp}(S_E) \geq h$ if and only if E contains a perfect matching.

5.2 Correctness of the if-part

This section shows that if E has a perfect matching, we can construct a planar secondary structure for S_E containing at least h stacking pairs. Therefore, $\text{sp}(S_E) \geq h$.

First of all, we establish several basic steps for constructing stacking pairs on S_E .

- $\delta(i)$ or $\overline{\delta(i)}$ itself can form $d-1$ stacking pairs, while $\delta(i)$ and $\overline{\delta(i)}$ together can form $3d-2$ stacking pairs.
- $\pi(i)$ and $\overline{\pi(i)}$ together can form $6d-2$ stacking pairs.
- For any $i \neq j$, $\pi(i)$ and $\overline{\pi(j)}$ together can form $6d-3$ stacking pairs.

Lemma 5.1 *If E has a perfect matching, then $\text{sp}(S_E) \geq h$.*

Proof. Let $M = \{e_{j_1}, e_{j_2}, \dots, e_{j_n}\}$ be a perfect matching. Without loss of generality, we assume that $1 \leq j_1 < j_2 < \dots < j_n \leq m$. Define $j_{n+1} = m+1$. To obtain a planar secondary structure for S_E with at least h stacking pairs, we consider the regions one by one. There are three cases.

Case 1: We consider any region S_j such that $e_j \notin M$. Our goal is to show that $\sigma = 3n(3d-2) + 6d-1$ stacking pairs can be formed within S_j . Note that there are $(m-n)$ edges not in M . Thus, we can obtain a total of $(m-n)\sigma$ stacking pairs in this case. Details are as follows. Assume that $e_j = (x_{p_j}, y_{q_j}, z_{r_j})$.

- $6d-2$ stacking pairs can be formed between V_j and $\overline{V_j}$, and between W_j and $\overline{W_j}$.
- $3d-2$ stacking pairs can be formed between $\langle x_i \rangle$ and $\langle \overline{x_i} \rangle$ for all $i \neq p_j$, and between $\langle y_i \rangle$ and $\langle \overline{y_i} \rangle$ for all $i \neq q_j$, and between $\langle z_i \rangle$ and $\langle \overline{z_i} \rangle$ for all $i \neq r_j$.
- $\langle \overline{x_{p_j}} \rangle$, $\langle \overline{y_{q_j}} \rangle$, and $\langle \overline{z_{r_j}} \rangle$ can each form $d-1$ stacking pairs.

The total number of stacking pairs that can be formed within S_j is $2(6d-2) + 3(n-1)(3d-2) + 3(d-1) = 3n(3d-2) + 6d-1 = \sigma$.

Case 2: We consider the edges $e_{j_1}, e_{j_2}, \dots, e_{j_n}$ in M . Our goal is to show that each corresponding region accounts for $\sigma + 6d-4$ stacking pairs. Thus, we obtain a total of $n\sigma + n(6d-4)$ stacking pairs in this case. Details are as follows. Unlike Case 1, each region S_{j_k} , where $1 \leq k \leq n$, may have some of its bases paired with that of $S_{j_{k+1}}$.

- $6d-3$ stacking pairs can be formed between W_{j_k} in S_{j_k} and $\overline{W_{j_{k+1}}}$ in $S_{j_{k+1}}$.
- $6d-2$ stacking pairs can be formed between V_{j_k} in S_{j_k} and $\overline{V_{j_k}}$ in S_{j_k} .

- $3d - 2$ stacking pairs can be paired between $\langle x_i \rangle$ in S_{j_k} and $\langle \overline{x_i} \rangle$ in S_{j_k} for any $i \neq p_{j_1}, \dots, p_{j_k}$, and between $\langle y_i \rangle$ in S_{j_k} and $\langle \overline{y_i} \rangle$ in S_{j_k} for any $i \neq q_{j_1}, \dots, q_{j_k}$, and between $\langle z_i \rangle$ in S_{j_k} and $\langle \overline{z_i} \rangle$ in S_{j_k} for any $i \neq r_{j_1}, \dots, r_{j_k}$.
- $3d - 2$ stacking pairs can be paired between $\langle x_i \rangle$ in S_{j_k} and $\langle \overline{x_i} \rangle$ in $S_{j_{k+1}}$ for any $i = p_{j_1}, \dots, p_{j_k}$, and between $\langle y_i \rangle$ in S_{j_k} and $\langle \overline{y_i} \rangle$ in $S_{j_{k+1}}$ for any $i = q_{j_1}, \dots, q_{j_k}$, and between $\langle z_i \rangle$ in $S_{j_{k+1}}$ and $\langle \overline{z_i} \rangle$ in $S_{j_{k+1}}$ for any $i = r_{j_1}, \dots, r_{j_k}$.

The total number of stacking pairs charged to S_{j_k} is $6d - 3 + 6d - 2 + 3n(3d - 2) = \sigma + 6d - 4$.
Case 3: We consider S_{m+1} . We can form $6d - 2$ stacking pairs between V_{m+1} and $\overline{V_{m+1}}$, and $6d - 3$ stacking pairs between W_{m+1} and $\overline{W_{j_1}}$. The number of such stacking pairs is $12d - 5$.

Combining the three cases, the number of stacking pairs that can be formed on S_E is $(m - n)\sigma + n(\sigma + 6d - 4) + 12d - 5$, which is exactly h . Notice that no two stacking pairs formed cross each other. Thus, $\text{sp}(S_E) \geq h$. $\square$

5.3 Correctness of the only-if part

This section shows that if E has no perfect matching, then $\text{sp}(S_E) < h$. We first give the framework of the proof in Section 5.3.1. Then, some basic definitions and concepts are presented in Section 5.3.2. The proof of the only-if part is given in Section 5.3.3.

5.3.1 Framework of the proof

Let OPT be a secondary structure of S_E with the maximum number of stacking pairs. Let $\#\text{OPT}$ be the number of stacking pairs in OPT . That is, $\#\text{OPT} = \text{sp}(S_E)$. In this section, we will establish an upper bound for $\#\text{OPT}$. Recall that we only consider Watson-Crick base pairs, i.e., $A - U$ and $C - G$ pairs. We define a conjugate of a substring in S_E as follows.

Conjugates: For every substring $R = s_1 s_2 \dots s_k$ of S_E , the *conjugate* of R is $\hat{R} = \hat{s}_k \dots \hat{s}_1$, where $\hat{A} = U$, $\hat{U} = A$, $\hat{C} = G$, and $\hat{G} = C$.

For example, AA 's conjugate is UU and UA 's conjugate is UA . To form a stacking pair, two adjacent bases must be paired with another two adjacent bases. So, we concentrate on the possible patterns of adjacent bases in S_E .

2-substrings: In S_E , any two adjacent characters are referred to as a 2-substring. By construction, S_E has only ten different types of 2-substrings: UU , AA , UA , GG , CC , GC , AG , GA , GU , and CA -substrings. A 2-substring can only form a stacking pair with its conjugate. If they actually form a stacking pair in OPT , they are said to be *paired*.

Since the conjugates of AG , GA , GU , and CA -substrings do not exist in S_E , there is no stacking pair in S_E which involves these 2-substrings. We only need to consider AA , UU , UA , GG , CC , GC -substrings. Table 1 shows the numbers of occurrences of these 2-substrings in S_j ($1 \leq j \leq m + 1$) and the total occurrences of these substrings in S_E .

Substring (t)	Total number of occurrences of t in		
	S_j ($j = 1, 2, \dots, m$)	S_{m+1}	S_E
AA	$3n(d-2) + (3n-3)(2d-2)$	$3n(2d-2)$	$m(3n(d-2) + (3n-3)(2d-2)) + 3n(2d-2)$
UU	$3n(2d-2) + (3n-3)(d-2)$	$3n(d-2)$	$m(3n(2d-2) + (3n-3)(d-2)) + 3n(d-2)$
UA	$2(6n-3)$	$6n$	$2m(6n-3) + 6n$
GG	$2(6d-2)$	$2(6d-2)$	$2(m+1)(6d-2)$
CC	$2(6d-2)$	$2(6d-2)$	$2(m+1)(6d-2)$
GC	4	4	$4m+4$

Table 1: Number of occurrences of different 2-substrings

Let $\#AA$ denote the number of occurrences of AA -substrings in S_E . We use the $\#$ notation for other types of 2-substrings in S_E similarly. The following fact gives a straightforward upper bound for $\#OPT$.

Fact 5.2 $\#OPT \leq \min\{\#AA, \#UU\} + \min\{\#GG, \#CC\} + \#UA/2 + \#GC/2$
 $= h + n + 1 + (2m + 2).$

Note that OPT may not pair all AA -substrings with UU -substrings. Let $\diamond AA$ be the number of AA -substrings that are not paired in OPT . Again, we use the $\diamond$ notation for other types of 2-substrings. Fact 5.2 can be strengthened as follows.

Fact 5.3 $\#OPT \leq \min\{\#AA - \diamond AA, \#UU - \diamond UU\} + \min\{\#GG - \diamond GG, \#CC - \diamond CC\} +$
 $(\#UA - \diamond UA)/2 + (\#GC - \diamond GC)/2.$

The upper bound given in Fact 5.3 forms the basis of our proof for showing that $\#OPT < h$. In the following sections, we consider the possible structure of OPT . For each possible case, we show that the lower bounds for some $\diamond$ values, such as $\diamond AA$ and $\diamond CC$, are sufficiently large so that OPT can be shown to be less than h . In particular, in one of the cases, we must make use of the fact that E does not have a perfect matching in order to prove the lower bound for $\diamond AA$, $\diamond UA$, and $\diamond UU$. We give some basic definitions and concepts in Section 5.3.2. The lower bounds and the proof are given in Section 5.3.3.

5.3.2 Definitions and concepts

In this section, we give some definitions and concepts which are useful in deriving lower bounds for $\diamond$ values. We first classify each region S_j in S_E as either *open* or *closed* with respect to OPT . Then, extending the definitions of fragments and conjugates, we introduce *conjugate fragments* and *delimiter fragments*. Finally, we present a property of delimiter fragments in open regions.

Open and closed regions: With respect to OPT , a region S_j in S_E is said to be an *open region* if some UU , AA , or UA -substrings in S_j are paired with some 2-substrings outside S_j ; otherwise, it is a *closed region*.

Lemma 5.4 *If S_{m+1} is a closed region, then $\#OPT < h$.*

Proof. S_{m+1} has $3nd$ more AA -substrings than UU -substrings. If S_{m+1} is a closed region, these $3nd$ AA -substrings are not paired by OPT. Thus, $\diamond AA \geq 3nd$. By Fact 5.3, $\#OPT < h + (n + 1) + (2m + 2) - 3nd < h$. $\square$

Recall that S_E is a sequence composed of δ 's, $\bar{\delta}$'s, π 's, and $\bar{\pi}$'s. Each $\delta(k)$ (respectively $\bar{\delta}(k)$) consists of two substrings of the form U^+A^+ , each of these substrings is called a *fragment*. Furthermore, each $\pi(k)$ (resp. $\bar{\pi}(k)$) consists of two substrings of the form C^+ (respectively G^+), each of these substrings is also called a fragment.

Conjugate fragments and delimiter fragments: Consider any fragment F in S_E . Another fragment F' in S_E is called a *conjugate fragment* of F if F' is the conjugate of F . Note that if F is a fragment of a certain $\delta(k)$ (resp. $\pi(k)$), then F' appears only in some $\bar{\delta}(k)$ (respectively $\bar{\pi}(k)$), and vice versa. By construction, if F is a fragment of some delimiter sequence V_j or W_j , then F has a unique conjugate fragment in S_E , which is located in $\bar{V}_j$ or $\bar{W}_j$, respectively. However, if F is a fragment of some non-delimiter sequence, says, $\langle x_i \rangle$, then for every instance of $\langle \bar{x}_i \rangle$ in S_E , F contains one conjugate fragment in $\langle \bar{x}_i \rangle$.

A fragment F is said to be *paired* with its conjugate fragment F' by OPT if OPT includes all the pairs of bases between F and F' .

For $1 \leq j \leq m + 1$, the fragment F in V_j or W_j is called a *delimiter fragment*. Note that the delimiter fragment F should be of the form C^{2d+k} for $2d > k > 0$.

The following lemma shows a property of delimiter fragments in open regions.

Lemma 5.5 *If S_j is an open region, then both delimiter fragments of either V_j or W_j must not pair with their conjugate fragments in OPT.*

Proof. We prove the statement by contradiction. Suppose one fragment of V_j and one fragment of W_j are paired with their conjugate fragments. Let $(s_x, s_{x+1}; s_{y-1}, s_y)$ and $(s_{x'}, s_{x'+1}; s_{y'-1}, s_{y'})$ be some particular stacking pairs in V_j and W_j , respectively. Since S_j is an open region, we can identify a stacking pair $(s_{x''}, s_{x''+1}; s_{y''-1}, s_{y''})$ where $s_{x''}s_{x''+1}$ and $s_{y''-1}s_{y''}$ are 2-substrings within and outside S_j , respectively. Note that these three stacking pairs form an interleaving block. By Lemma 2.1, OPT is not planar, reaching a contradiction. $\square$

5.3.3 Proof of the only-if part

By Lemma 5.4, it suffices to assume that S_{m+1} is an open region. Before we give the proof of the only-if part, let us consider the following lemma.

Lemma 5.6 *Let α be the number of delimiter fragments that are not paired with their conjugate fragments. Then, $\diamond CC + \diamond GG \geq \alpha + (\#GC - \diamond GC)$.*

Proof. By construction, a GC -substring must be next to the left end of a delimiter fragment F , which is of the form C^+ . No other GC -substrings can exist. If this GC -substring is paired, the leftmost CC -substring of F must not be paired as there is no GGC pattern in S_E . Thus, F must be one of the α delimiter fragments that are not paired with their conjugate fragments. Based on this observation, we classify the α delimiter fragments into

two groups: (1) $(\#GC - \diamond GC)$'s delimiter fragments whose GC -substrings at the left end are paired; and (2) $\alpha - (\#GC - \diamond GC)$'s delimiter fragments whose GC -substrings at the left end are not paired.

For each delimiter fragment $F = C^{2d+k}$ in group (1), since the GC -substring on the left of F is paired, the leftmost CC -substring of F must not be paired by OPT. For the remaining $2d + k - 2$ CC -substrings, we either find a CC -substring which is not paired by OPT; or these $2d + k - 2$ CC -substrings are paired to GG -substrings in some fragment $F' = G^{2d+k'}$ with $2d > k' > k$, and thus, some GG -substring of F' is not paired. Therefore, each delimiter fragment in group (1) introduces either (i) two unpaired CC -substrings or (ii) one unpaired CC -substring and one unpaired GG -substring. Hence, the total number of unpaired CC and GG -substrings due to delimiter fragments in group (1) $\geq 2(\#GC - \diamond GC)$.

For each delimiter fragment $F = C^{2d+k}$ in group (2), consider the CC -substrings in F . With a similar argument, we can show that each delimiter fragment in group (2) introduces either (i) one unpaired CC -substring or (ii) one unpaired GG -substring. Hence, the total number of unpaired CC and GG -substrings due to delimiter fragments in group (2) $\geq \alpha - (\#GC - \diamond GC)$.

In total, we have $\diamond CC + \diamond GG \geq \alpha + (\#GC - \diamond GC)$. $\square$

Now, we state a lemma which shows the lower bounds for some $\diamond$ values in terms of the number of open regions in OPT.

Lemma 5.7 *Let $\ell \geq 1$ be the number of open regions in OPT.*

- (1) *If S_{m+1} is an open region, then $\diamond UU \geq 3(m+1-\ell)d$.*
- (2) $\max\{\diamond CC, \diamond GG\} \geq \ell + (\#GC - \diamond GC)/2$.
- (3) *If $\ell = n+1$, S_{m+1} is an open region, and E does not have a perfect matching, then either (a) $\diamond UU \geq 3(m-n)d+1$, (b) $\diamond AA \geq 1$, or (c) $\diamond UA \geq 2$.*

Proof.

Statement 1. Within each closed region S_j where $j \neq m+1$, $3d$'s UU -substrings cannot be paired in OPT. As there are $m+1-\ell$ such closed regions, $3(m+1-\ell)d$ UU -substrings are not paired in OPT. Thus, $\diamond UU \geq 3(m+1-\ell)d$.

Statement 2. By Lemma 5.5, we can identify 2ℓ fragments in V_j and W_j of all open regions which are not paired with their conjugate fragments. Then, by Lemma 5.6, we have $\diamond CC + \diamond GG \geq 2\ell + (\#GC - \diamond GC)$. Thus, $\max\{\diamond CC, \diamond GG\} \geq \ell + (\#GC - \diamond GC)/2$.

Statement 3. By a similar argument to the proof for Statement 1, within the $m+1-\ell = m-n$ closed regions, $3(m-n)d$ UU -substrings are not paired in OPT.

For the $\ell = n+1$ open regions, one of them must be S_{m+1} . Let $S_{j_1}, \dots, S_{j_n}$ be the remaining n open regions. Recall that $e_{j_1}, \dots, e_{j_n}$ are the corresponding edges of these n open regions. Since these n edges cannot form a perfect matching, some node, say x_k , is adjacent to these n edges more than once. Thus, within $S_{j_1}, \dots, S_{j_n}, S_{m+1}$, we have more $\langle x_k \rangle$ than $\langle \overline{x_k} \rangle$. Therefore, at least two of the fragments in all $\langle x_k \rangle$ are not paired with their conjugate fragments.

Let F be one of such fragments. Note that F is of the form $U^d A^k$. Since F is not paired with its conjugate fragment, one of the following three cases occurs in OPT:

Case 1: An UU -substring of F is not paired.

Case 2: An AA -substring of F is not paired.

Case 3: All UU -substrings and AA -substrings of F are paired. In this case, U^d of F is paired with A^d of a fragment $F' = U^{k'} A^d$; and A^k of F is paired with some substring U^k of some fragment F'' . As F' and F'' are not the same fragment, the UA -substrings of both F and F' are not paired.

In summary, we have either (1) $\Diamond UU \geq 3(m-n)d+1$, or (2) $\Diamond AA \geq 1$, or (3) $\Diamond UA \geq 2$.

□

Based on Lemma 5.7, we prove the only-if part by a case analysis in the following lemma.

Lemma 5.8 *If E does not have a perfect matching, then $\#OPT < h$.*

Proof. Recall that if S_{m+1} is a closed region, then $\#OPT < h$. Now, suppose that S_{m+1} is an open region. We show $\#OPT < h$ in three cases $\ell < n+1$, $\ell > n+1$ and $\ell = n+1$.

Case 1: $\ell < n+1$. By Lemma 5.7 (1), $\Diamond UU \geq 3(m+1-\ell)d$. By Fact 5.3, we can conclude that $\#OPT = h + n + 1 + (2m+2) - 3(n+1-\ell)d \leq h + n + 1 + (2m+2) - 3d < h$.

Case 2: $\ell > n+1$. By Lemma 5.7 (2), $\max\{\Diamond CC, \Diamond GG\} \geq \ell + (\#GC - \Diamond GC)/2$. By Fact 5.3, $\#OPT \leq h + n + 1 - \ell$, which is smaller than h because $\ell > n+1$.

Case 3: $\ell = n+1$. By Lemma 5.7 (3), either (a) $\Diamond UU \geq 3(m-n)d+1$, or (b) $\Diamond AA \geq 1$, or (c) $\Diamond UA \geq 2$. By Fact 5.3, $\#OPT \leq h + n - \max\{\Diamond CC, \Diamond GG\} + (\#GC - \Diamond GC)/2$. By Lemma 5.7 (2), we have $\#OPT < h$. □

We conclude that if E does not have a perfect matching, then $\#OPT < h$. Equivalently, if $\#OPT \geq h$, then E has a perfect matching.

6 Conclusions

In this paper, we have studied the problem of predicting RNA secondary structures that allow arbitrary pseudoknots with a simple free energy function that is minimized when the number of stacking pairs is maximized. We have proved that this problem is NP-hard if the secondary structure is required to be planar. We conjecture that the problem is also NP-hard for the general case. We have also given two approximation algorithms for this problem with worst-case approximation ratios of $1/2$ and $1/3$ for planar and general secondary structures, respectively. It would be of interest to improve these approximation ratios.

Another direction is to study the problem using energy function that is minimized when the number of base pairs is maximized. It is known that this problem can be solved in cubic time if the secondary structure can be non-planar [7]. However, the computational complexity of the problem is still open if the secondary structure is required to be planar. We conjecture that the problem becomes NP-hard under this additional condition. We

would like to point out that the observation that have enabled us to visualize the planarity of stacking pairs on a rectangular grid does not hold in case of maximizing base pairs.

References

- [1] T. Akutsu. Dynamic programming algorithms for RNA secondary structure prediction with pseudoknots. *Discrete Applied Mathematics*, 104(1-3):45–62, 2000.
- [2] M. Garey and D. Johnson. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. Freeman, New York, NY, 1979.
- [3] R. Lyngsø, M. Zuker, and C. Pedersen. Internal loops in RNA secondary structure prediction. In *Proceedings of the 3rd Annual International Conference on Computational Molecular Biology*, pages 260–267, Lyon, France, 1999.
- [4] R. B. Lyngsø and C. N. S. Pedersen. RNA pseudoknot prediction in energy based models. *Journal of Computational Biology*, 7(3/4):409–428, 2000.
- [5] R. B. Lyngsø, M. Zuker, and C. N. S. Pedersen. Fast evaluation of internal loops in RNA secondary structure prediction. *Bioinformatics*, 15(6):440–445, 1999.
- [6] J. Meidanis and J. Setubal. *Introduction to Computational Molecular Biology*. International Thomson Publishing, New York, 1997.
- [7] R. Nussinov, G. Pieczenik, J.R. Griggs, and D.J. Kleitman. Algorithms for loop matchings. *SIAM Journal on Applied Mathematics*, 35(1):68–82, 1978.
- [8] E. Rivas and S. R. Eddy. A dynamic programming algorithm for RNA structure prediction including pseudoknots. *Journal of Molecular Biology*, 285(5):2053–2068, 1999.
- [9] M. Tompa. Lecture notes on biological sequence analysis. Technical Report #2000-06-01, Department of Computer Science and Engineering, University of Washington, Seattle, 2000.
- [10] Y. Uemura, A. Hasegawa, S. Kobayashi, and T. Yokomori. Tree adjoining grammars for RNA structure prediction. *Theoretical Computer Science*, 210(2):277–303, 1999.
- [11] M. S. Waterman. *Introduction to Computational Biology: Maps, Sequences and Genomes*. Chapman & Hall, New York, NY, 1995.
- [12] M. Zuker. The use of dynamic algorithms in RNA secondary structure prediction. In M. S. Waterman, editor, *Mathematical Methods for DNA Sequences*, pages 159–184. CRC Press Inc., Boca Raton, FL, 1989.
- [13] M. Zuker and D. Sankoff. RNA secondary structures and their prediction. *Bulletin of Mathematical Biology*, 46(4):591–621, 1984.